


Hinton

HINTON PRESSURE TESTING PUMP

HPUMP1

TEST & CORRECT

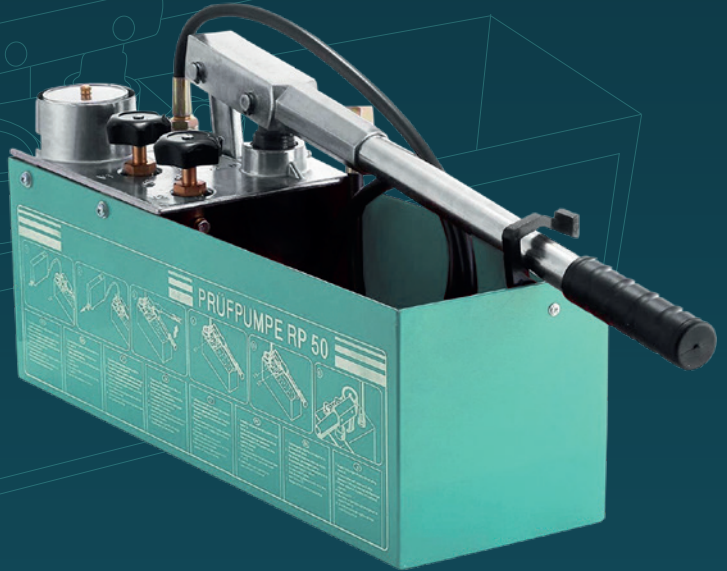

PRESSURE TEST PUMP WORKING PRESSURE: 0-50 BAR

100% FIRE TESTED

DOUBLE RUNNING NEEDLE VALVES ENSURE GOOD OPERATION

1/4" X 53@ HOSE – OUTLET
CONNECTION: 1/2" FEMALE NPT

TANK VOLUME: 3.0 GALLON FLUID TANK
– 726PSI (5 MPA)

GLYCERIN FILLED PRESSURE GUAGE

FLOW VOLUME: 45ML

FOR USE WITH THE STANDARD MAP² GAS
AND PROPANE CYLINDERS

STAINLESS STEEL WATER TANK

STRONG AND RELIABLE

LUBRICATED PUMP PLUNGER

DURABLE ALUMINIUM FRAME

ERGONOMIC FOAM GRIP